



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

#2

REC'D 30 OCT 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02017547.7

BEST AVAILABLE COPY

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr.:
Application no.: 02017547.7
Demande no:

Anmeldetag:
Date of filing: 06.08.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

JOMED NV
Bamfordweg 1
6235 NS Ulestraten
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Catheter

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

A61M25/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

EPO - Munich.
6

06. Aug. 2002

JOMED N.V.
Bamfordweg 1
NL - 6235 NS Ulestraten
Niederlande

JOM020801PEP-2/bs
August 6, 2002

Catheter

Description

The present invention concerns a catheter, in particular for use in delivering a stent, according to the preamble part of claim 1.

Such a catheter is known from WO 98/07390. The known catheter in the form of a stent delivery system comprises short solid marker bands made from a radiopaque material. These marker bands constitute solid tubes. The drawback of these tubes is the increase of profile of the balloon and, even more important, the resulting rigid length of between 1 mm to 1.2 mm what, in turn, results in a reduction of the flexibility of the catheter tube. Therefore, the known catheter, when pushed forward through a curved vessel, suffers from the drawback of an undesired stiffness in the region of the marker bands diminishing especially the trackability of the catheter. Finally, this stiffening of the catheter tube results in a certain danger of buckling of the catheter.

It is therefore an object underlying the present invention to provide a catheter according to the preamble part of claim 1, overcoming the beforementioned drawbacks of the prior art and providing a marker arrangement of a high X-ray visibility along with a sufficient flexibility and trackability of the catheter.

The solution of this object is achieved by the features of claim 1.

The provision of markers being made of a wire of a highly radiopaque and ductile material reduces the rigid length of the markers as the wire provides higher flexibility and also less profile.

Therefore, the catheter according to the present invention provides a high flexibility and trackability and, simultaneously, the indication of the length of the cylindrical part of the balloon or the length of a stent mounted on the balloon is ensured by the highly radiopaque and ductile material of the wire-markers.

The dependent claims contain advantageous embodiments of the present invention.

The specifically advantageous embodiment of the catheter according to the present invention provides for a wire that is wrapped around the inner tube and preferably at least partly embedded in the tube material.

Furthermore, it is possible to build up different kinds of wire arrangements, especially the wire arrangement of a plurality of at least partly overlapping layers what enhances the radiopaqueness even more.

Preferred diameters of the wire of the marker according to the present invention are 0,01, 0,02 and/or 0,04 mm.

The free ends of the wire can be fixed either mechanically or by using an adhesive bonding.

The wire can have various kinds of cross-sectional configurations, preferably circular or flat and rectangular cross-sections.

Moreover, it is possible to cover the wrapped wire with an additional thin tube-like cover.

Claim 9 defines a marker according to the present invention, adapted to be used in a catheter according to the preamble portion of claim 1.

The following is a description of some specific embodiments of the present invention, reference being made to the accompanying drawings, in which

Fig. 1 is a schematically simplified view of the distal end of a catheter according to the present invention,

Figs. 2 to 4 are different marker arrangements according to the present invention, and

Fig. 5 is a schematically simplified view of the reaction of a marker according to the present invention upon bending of the catheter tube the marker band is mounted on.

Fig. 1 depicts a catheter 1 that is particularly adapted for use in delivering a stent 5 disposed on an exterior surface 6 of a balloon 4 of catheter 1.

Balloon 4 is sealingly connected to a first tube 15 adjacent to the distal end of the balloon. The balloon 4 defines an interior volume 14 that is in communication with a first lumen 9 of the first outer tube 15. So, e. g. a heated fluid can be introduced through the proximal end of the first lumen 9 in order to pressurize the balloon 4 and to heat the stent engagement region 6.

Fig. 1, furthermore, displays a second inner tube 2 that, for the depicted embodiment, is disposed concentrically within the

first outer tube 15. This second inner tube 2 defines a second inner lumen 17 for a guidewire 3.

Finally, the catheter 1 comprises a marker arrangement 7, 8 that is disposed on the second inner tube 3 within interior volume 14 of balloon 4.

The preferred embodiment of the catheter shown in Fig. 1 comprises two markers 10, 11, constituting the marker arrangement 7, 8 and being made from a wire of a highly radiopaque and ductile material.

Fig. 2 shows a part of the second inner tube 2 with the marker 10 being partly embedded within the wall material 12 of tube 2. Basically, the wire of marker 10 can also be totally embedded in material 12 of the wall of the second inner tube 2.

Fig. 3 depicts also part of second inner tube 2 showing a coil-like marker 10 that can also be embedded partly or totally within the material 12 of the tube wall.

Fig. 4 shows a particularly advantageous embodiment of the marker 10 (or, of course, also of marker 11) comprising two layers 13, 16 of partly overlapping wires.

Fig. 5 depicts tube 2 in a bent state. The inner part 18 of the wire marker 10 or 11 is compressed in this state while the outer part 19 of marker 10 is expanded thus ensuring a higher flexibility and trackability of the catheter 1 according to the present invention.

Moreover, the before-explained catheter 1 may comprise a catheter tip being equipped with one marker. This arrangement can secure the visibility of the catheter tip and can be used

with balloon catheters, aspiration catheters, guide catheters, angiographic catheters, imaging catheters, and in general with any kind of catheter.

The positioning of the marker according to the present invention at the catheter tip enhances the flexibility and the softness of the catheter tip what is particularly important in order to prevent the wall of the body vessels from being injured.

Moreover, the high flexibility results in an improved trackability of the entire catheter according to the present invention.

Claims

1. A catheter (1), in particular for use in delivering a stent (5), comprising:
 - a first outer tube (15) having a proximal end, a distal end and a wall defining a first lumen (9);
 - a balloon (4) sealingly connected to the first tube (15) adjacent the distal end, the balloon (4) defining an interior volume (14) and having an exterior surface (6);
 - a second inner tube (2) being disposed within the first outer tube (15) and defining a second inner lumen (17) for a guidewire (3); and
 - a marker arrangement (7, 8),
being characterized in
 - that said marker arrangement (7, 8) comprises at least one marker (10, 11) made from a wire of a highly radiopaque and ductile material.
2. Catheter according to claim 1, being characterized in that the wire is wrapped around the inner tube (2) to form a coil-like marker tube.
3. Catheter according to claim 1 or 2, being characterized in that the wire is wrapped in a plurality of at least partly overlapping layers (13, 16).
4. Catheter according to one of claims 1 to 3, being characterized in that the wire is at least partly embedded in the material (12) of the inner tube (2).
5. Catheter according to one of claims 1 to 4, being characterized in that the wire is covered by a thin tube-like cover.

6. Catheter according to one of claims 1 to 5, being characterized in that the wire has a circular cross-section.
7. Catheter according to one of claims 1 to 5, being characterized in that the wire has a flat, rectangular cross-section.
8. Catheter according to one of claims 1 to 7, being characterized in that the wire is made out of a material selected from the group of platinum, tantalum, gold and/or alloys of the before-listed materials.
9. Catheter according to one of claims 1 to 8, being characterized in that the marker arrangement (7, 8) is disposed on the second inner tube (3) within the balloon (4).
10. Catheter according to one of claims 1 to 9, being characterized in that said at least one marker (10, 11) is disposed at the catheter tip.
11. Marker (10, 11) for a catheter (1) according to the preamble part of claim 1, being characterized by at least one of the characterizing features of claims 1 to 10.

06. Aug. 2002

Abstract

In order to enhance the flexibility and trackability of a catheter (1) that is particularly adapted for use in delivering a stent (5), the catheter (1) comprises a marker arrangement (7, 8) that includes at least one marker (10, 11) made from a wire of a highly radiopaque and ductile material. Said wire is preferably wrapped around a second inner tube (2) of the catheter (1)

(Fig. 1)

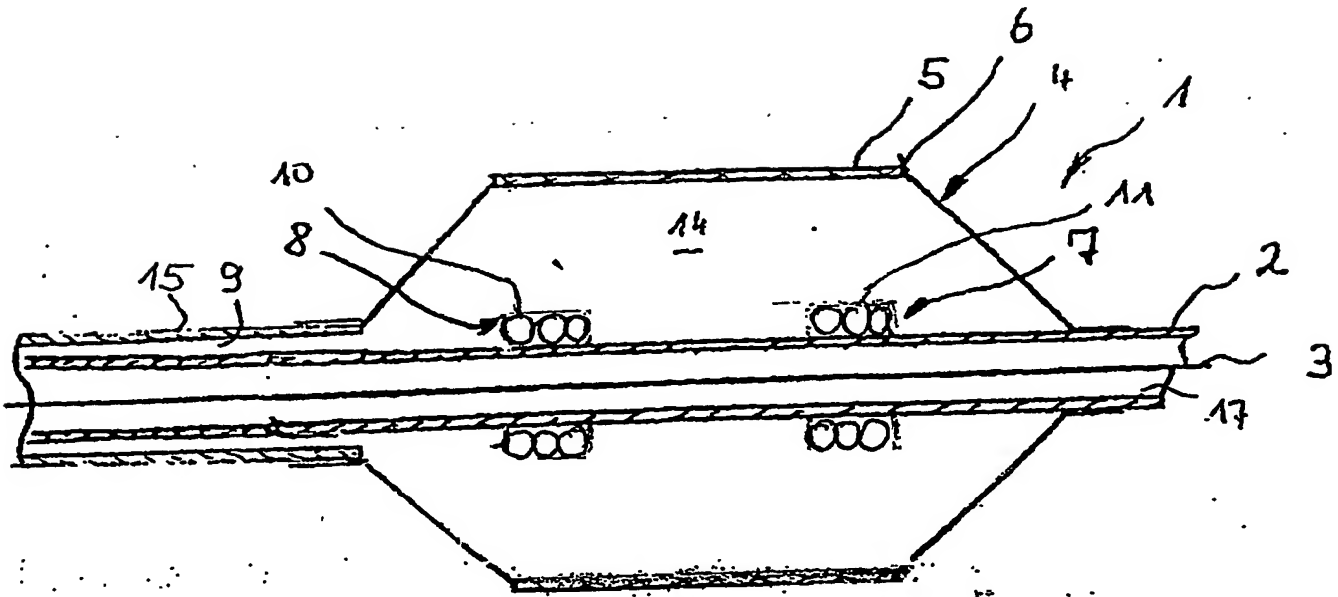


Fig. 1

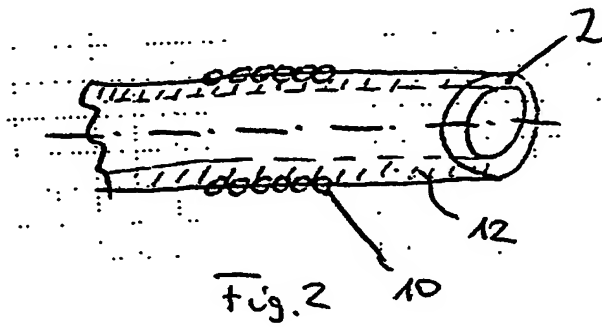


Fig. 2

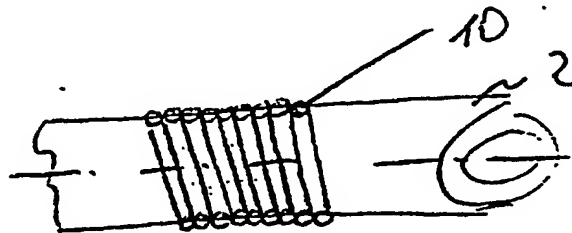


Fig. 3

Best Available Copy

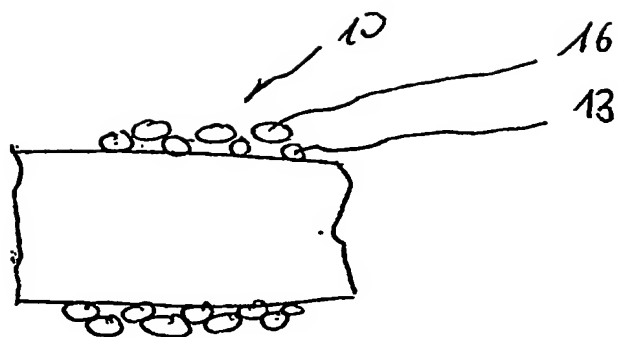


Fig. 4


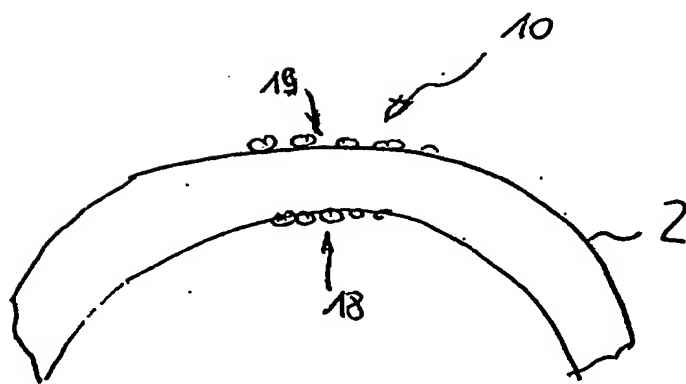


Fig. 5

Best Available Copy

PCT Application

EP0308493



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.